



coFlex[®] 600

ROLL-TO-ROLL PILOT SPUTTER ROLL COATER

**Fraunhofer Institute for
Organic Electronics, Electron Beam
and Plasma Technology FEP**

Winterbergstr. 28
01277 Dresden, Germany

Contact persons

Dr. Matthias Fahland
Phone +49 351 2586-135
matthias.fahland@fep.fraunhofer.de

Dr. Nicolas Schiller
Phone +49 351 2586-130
nicolas.schiller@fep.fraunhofer.de

www.fep.fraunhofer.de



The surface refinement of polymer films and other flexible substrates by applying thin coatings allows these materials to be used in a wide range of products. Vacuum based roll-to-roll plants allow coatings to be efficiently applied at favorable cost.

The *coFlex*[®] 600 vacuum web coating plant can be used to deposit optical, electrical, and decorative layers on substrates via sputtering techniques and magnetron PECVD processes. line speed of up to 100 meters per minute can be achieved.

Potential applications for the coated materials are numerous. Optical layer

systems are, for example, used for UV mirrors and as infrared-reflecting heat protection layers. Electromagnetic decoupling layers (EMI layers) and transparent conducting layers are used for displays. Flexible solar cells require front and back contacts or transparent conducting layers which are applied to polymer films.

The *coFlex*[®] 600 has a pretreatment unit, optical in-situ measuring units, and several coating chambers. Thus, at Fraunhofer FEP we have available a total system for the development and pilot production of multilayer systems under near-real production conditions.

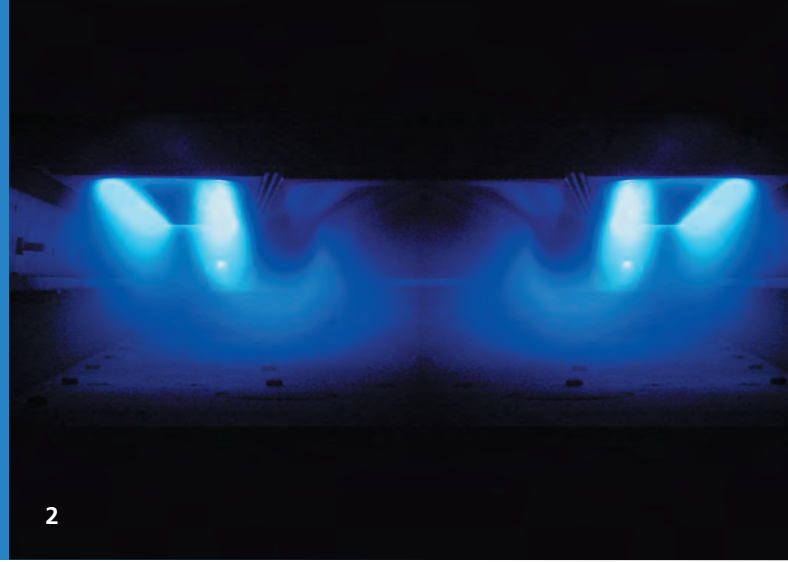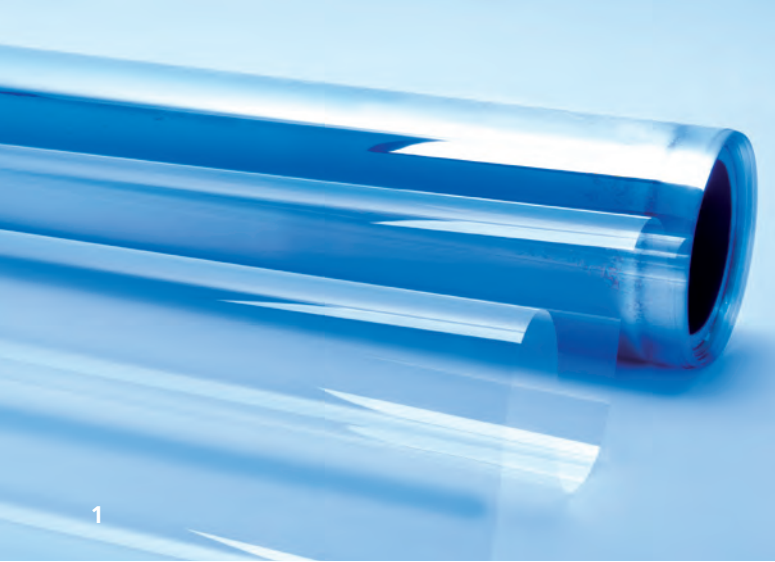

Technical specifications

deposition width	600 mm
web width	650 mm
web thickness	7 ... 200 µm
max. external diameter	400 mm
web speed	0.1 ... 100 m/min
process modules	<ul style="list-style-type: none"> ▪ dual magnetron sputter systems (DMS systems) ▪ single magnetron sputter systems (SMS systems) ▪ ion source
coating material	metals, TiO ₂ , SiO ₂ , Nb ₂ O ₅ , ITO, ZAO, SnO ₂ , HfO ₂ , WO ₃ , TiN, Si ₃ N ₄ , ZrO ₂ , ...
in-situ monitoring	<ul style="list-style-type: none"> ▪ optical transmission and reflection ▪ electrical resistance


Technology

- pulse magnetron sputtering:
 - dual magnetron sputtering
 - unipolar magnetron sputtering
- DC sputtering
- magnetron PECVD
- in-line pretreatment

Our offer

- development of technologies for coating polymer films and other flexible materials and development of plasma pretreatment processes
- development of layer systems (optical, electrical, and decorative functional layers, barrier layers)
- development and testing of key components
- sample provision for testing and marketing purposes, and pilot production
- studies on the efficiency of coating processes

Schematic representation of the coFlex® 600

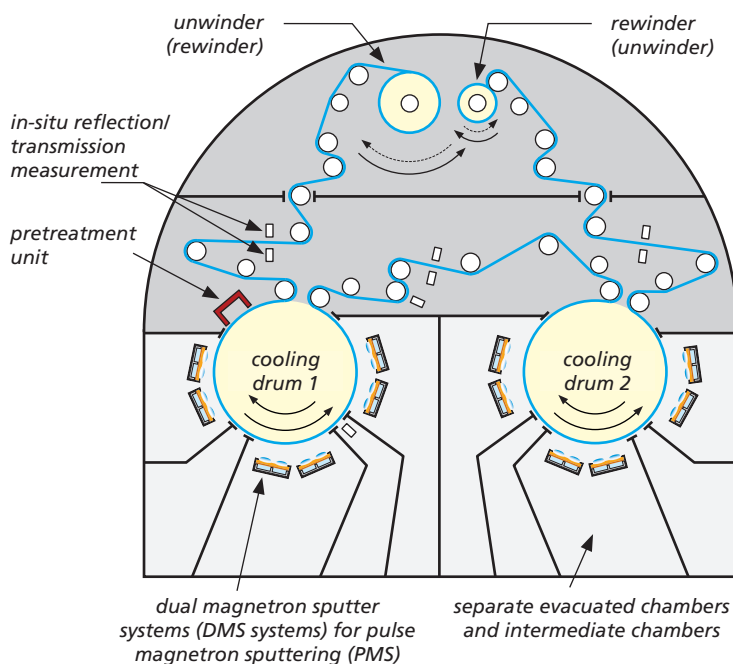

- 1 Coated roll of polymer film
- 2 Pulse magnetron sputtering (PMS)