

***novoFlex® 600***  
**ROLL-TO-ROLL PILOT WEB COATER**





1



2



3

### Versatile vacuum coating technologies using a single machine

The *novoFlex*<sup>®</sup> 600 pilot web coater allows coating of polymer films with different materials in any desired sequence.

The web coater includes various vacuum coating technologies which can be combined with each other in different ways. This versatility means that a wide range of coatings and layer combinations can be created.

Customers can also choose from a wide variety of substrates: In addition to polymer films made of PET, polypropylene (PP), and polylactides (PLA), the web coater can also be used to test and coat customer-specific polymer substrates, flexible metals foils and textiles.

The application of barrier layers to packaging films for the food industry is

one established area of work. The main benefit is the very high coating rate in order to coat large quantities of film at favorable cost.

The web coater can also be used to apply layers for special applications, for example transparent conducting electrodes and high barrier layers for flexible electronics.

### Technical specifications

coating width	≤ 600 mm
web speed	0.1 ... 600 m/min
web tension	30 ... 1500 N
substrates	<ul style="list-style-type: none"> <li>▪ polymer films (thickness: 3 ... 250 µm)</li> <li>▪ flexible metal foils</li> <li>▪ other flexible substrates (e. g. textiles) up to a thickness of 6 mm</li> <li>▪ double-sided coating possible</li> </ul>
maximum roll diameter	500 mm
maximum range of the web edge control	± 10 mm
subdivided into 5 coating chambers for simultaneous coating using up to 5 in-line processes	
<ul style="list-style-type: none"> <li>▪ 2 evaporation chambers for boat evaporators and/or electron beam evaporators <ul style="list-style-type: none"> <li>▫ boat evaporators, 8 boats with each up to 1300 A / 15 V</li> <li>▫ radiation-heated SiO evaporation</li> <li>▫ electron beam evaporator 60 kW / 30 kV</li> </ul> </li> <li>▪ 3 chambers for reactive pulse magnetron sputtering (PMS) (MF up to 50 kHz, power up to 60 kW) or magnetron PECVD</li> <li>▪ pre-treatment via ion source</li> <li>▪ all 5 process chambers differentially pumped (pressure difference up to a factor of 30)</li> </ul>	
2 coating drums of 750 mm diameter, each with separate temperature control in the range -20°C ... +90°C	
in-situ measuring technology	<ul style="list-style-type: none"> <li>▪ contact-free layer resistance measurement 0.01 ... 40 Ω</li> <li>▪ 6 channel reflection and transmission spectrometer</li> </ul>



## Our offer

- feasibility studies
- development of layer systems, products, and coating technologies for vacuum web coating
- scale-up of coating technologies to large web widths and high web speeds
- contract coating in the pilot phase of a product
- technology transfer and fitting web coating plants with key components (magnetrons, plasma sources, reactive gas systems, product and process monitoring systems)

## Technology


- in-line plasma pre-treatment
- plasma-activated high-rate evaporation
- pulse magnetron sputtering (PMS)
- magnetron PECVD (magPECVD)
- thermal evaporation
- electron beam evaporation
- in-situ measurement technology
- hollow cathode arc PECVD (arcPECVD)

## TITLE PHOTO

View of the novoFlex® 600

- 1 Magnetron PECVD
- 2 High-rate plasma-activated evaporation
- 3 Radiation-heated evaporator
- 4 Barrier layers for packaging films
- 5 Web drive system

## 6 Scheme

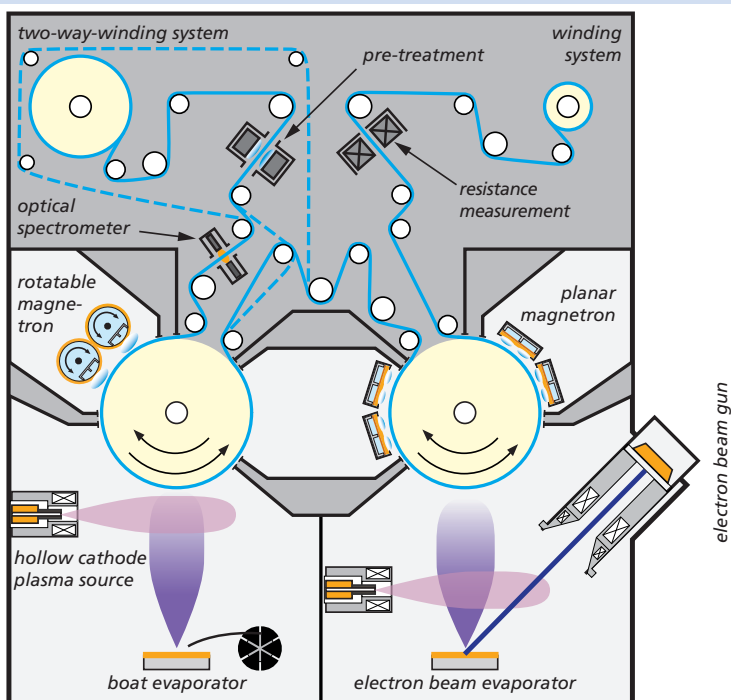

## Fraunhofer Institute for Organic Electronics, Electron Beam and Plasma Technology FEP

Winterbergstr. 28  
01277 Dresden, Germany

Contact persons

Steffen Straach  
Phone +49 351 2586-132  
steffen.straach@fep.fraunhofer.de

Dr. Nicolas Schiller  
Phone +49 351 2586-131  
nicolas.schiller@fep.fraunhofer.de

[www.fep.fraunhofer.de](http://www.fep.fraunhofer.de)

VON ARDENNE



Gefördert aus Mitteln  
der Europäischen Union

Europa fördert Sachsen.



EFRE  
Europäischer Fonds für  
regionale Entwicklung



*We focus on quality  
and the ISO 9001.*