

EFFI

ELECTRON BEAM MACHINE FOR SURFACE STRUCTURING AND FOR FINE AND MICRO WELDING PROCESSES

Fraunhofer Institute for Organic Electronics, Electron Beam and Plasma Technology FEP

Winterbergstr. 28
01277 Dresden

Contact persons

Falk Winckler
Phone +49 351 2586-207
falk.winckler@fep.fraunhofer.de

Dr. Gösta Mattausch
Phone +49 351 2586-202
goesta.mattausch@fep.fraunhofer.de

www.fep.fraunhofer.de

Plant manufacturer



An electron beam is a versatile tool whose effect is primarily based on a short-duration, localized input of heat into a substrate material. An important advantage of electron beam welding is the ability to be able to weld materials down to considerable depths: although strongly absorbed by the material, the electron beam is able to penetrate deep into the material due to the deep-weld effect. This makes this technique an ideal tool for joining combinations of materials.


Of all welding techniques, electron beam welding currently involves the lowest heat input for a given weld depth. Due to this minimum heat input, thermally sensitive sensors can, for example, be welded.

The electron beam can also be used to structure surfaces. Due to the minimum

heat input on the workpiece, an electron beam is ideal for processing thermally sensitive materials such as metal layers on polymer substrates. Reactive materials can also be effectively processed because the process takes place in a high vacuum and the reactive metals are not in contact with reaction partners.

Our electron beam plant EFFI can be used to weld, structure and engrave small parts made of conducting materials having a height and diameter of up to 15 centimeters.


Typical tasks that can be carried out in the machine include the welding of medical products (such as implants) and the welding of sensors and devices used in electronics and measuring technology.

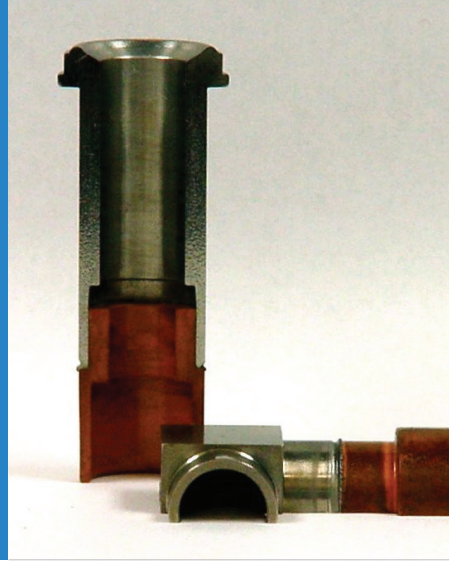

Technical specifications

electron beam generator	beam power up to 2 kW / acceleration voltage up to 60 kV max. beam deviation angle $\alpha \leq \pm 20^\circ$
workpiece insertion and handling	1 axis of rotation (Z), chuck with clamping diameter of 3 ... 88 mm rotation speed: continuous from 0 ... 32 min ⁻¹ vertical translation (Y): 120 mm vertical adjustment speed: 0 ... 3.5 mm/s substrate (part) size up to 150 mm × 150 mm × 150 mm (L × B × H)
vacuum system	working pressure (chamber) $\leq 5 \times 10^{-4}$ mbar short cycle times, as evacuation time < 2 min and pressurization time < 30 s
SEM imaging system	scanning electron imaging mode (SEM) with a choice of two detectors display in material and/or topographic contrast, max. scanned area ca. 100 × 150 mm ² resolution down to 25 μ m
process control	teach-in programming automatic standard welding processes / programmed deflection control alternating operating mode welding-scanning-welding engraving of any grayscale images

Schematic representation of the EFFI

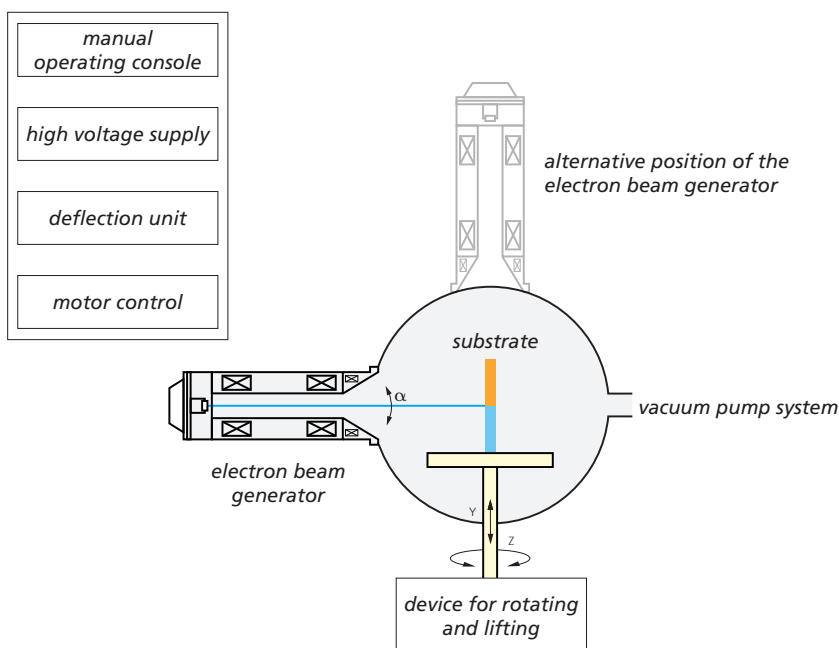

Our offer

- electron beam welding and micro-welding of parts
- homogenous and heterogeneous combinations of materials, e.g. steel-steel or copper-steel
- welding of parts having very different geometries, e.g. membranes with parts of housings or corrugated hoses with connectors
- local melting of surface layers
- electron beam structuring of metallic and non-metallic materials, in particular layers and layer systems
- inscribing and engraving of workpieces



We focus on quality
and the ISO 9001.